



Clustering Mining Method of College Students' Physical Exercise Behavior Characteristics based on Ant Colony Algorithm

Jianqiang Feng

Xi'an University of technology
Xi'an, 710048, Shaanxi, China
103713@xaut.edu.cn

ABSTRACT

Physical exercise is essential for the sustainable self-cultivation of college students and is an indispensable part of higher education. However, most college students lack systematic knowledge of physical exercise, making it difficult for them to exercise scientifically. Therefore, this paper introduces the ant colony algorithm into the model for extracting characteristics of college students' physical exercise behavior to improve the effectiveness of behavior recognition and clustering. Furthermore, the model's performance is enhanced through optimization of the ant colony algorithm. The experimental results demonstrate that the clustering model of college students' physical exercise behavior, based on the ant colony algorithm, effectively reduces the error rate and maintains good accuracy as the sample size increases, indicating good stability and reliability. Additionally, for different physical exercise behaviors, the clustering F-measure standard values of the model all exceed 0.8, indicating a better clustering effect.

Keywords: Ant Colony Algorithm, Physical Exercise, Behavior Characteristics, Clustering Mining

Received: 9 November 2024, **Revised:** 25 January 2025, **Accepted** 18 February 2025

Copyright: with Authors

1. Introduction

Physical fitness is crucial for the sustainable development of individuals and society; cultivating physical fitness has always been an essential part of contemporary education. Compared with high school students, college students have more freedom in time allocation, and teachers mainly play a guiding role. Therefore, without compulsory exercise requirements and intense supervision, many college students exhibit significant differences in the allocation of time between studying and engaging in physical exercise. The exercise time and intensity may not meet the needs of college students' physical fitness development. According to relevant surveys, although most college students recognize that physical exercise can improve their physical fitness,

they find it challenging to control the amount of exercise scientifically due to a lack of systematic cognition and training during the exercise process. At the same time, many college students' exercise behaviors are incorrect, leading to potential physical injuries and failing to achieve the goal of adequate exercise.

To enhance the accuracy of college students' physical exercise behavior and facilitate their receipt of scientific feedback during the exercise process, information technology, big data, and artificial intelligence have been widely applied in the field of physical exercise behavior research. Monitoring and feedback systems for college students' physical exercise have been developed, enabling students to adjust their exercise behavior promptly based on the feedback information and ensure the accuracy of their sports behavior. As college students' physical exercise behavior is dynamic, there are significant difficulties in recognizing exercise behavior, and different recognition methods have considerable differences in accuracy. Moreover, it is challenging to adapt to the recognition of different exercise behavior characteristics, resulting in a relatively narrow scope of application. Additionally, some algorithms in behavior clustering analysis, which is based on behavior characteristics, suffer from issues such as lengthy processing times, significant errors, and high dependence on manually set conditions, resulting in insufficient precision in obtaining results. Therefore, this paper introduces the ant colony algorithm into the model for extracting college students' physical exercise behavior characteristics, aiming to find the optimal clustering path using the ant colony algorithm to enhance the effectiveness and efficiency of behavior feature clustering. It aims to achieve better the purpose of clustering analysis and mining of college students' physical exercise behavior characteristics.

2. Identification and Analysis of Physical Exercise Behavior

As people pay increasing attention to physical exercise, many scholars have identified issues such as improper movements, excessive exercise, and physical injuries that can occur during the exercise process. Not only does this fail to achieve the goal of exercising the body, but it also causes particular harm to the body and mind [4]. Additionally, college students exhibit two distinct trends in physical exercise. Some students, due to age, personality, and other reasons, tend to prefer adventurous sports, while others tend to engage in minimal or avoid physical exercise. According to relevant surveys, many college students have reported injuries during physical exercise, primarily due to a lack of professional guidance and a limited understanding of scientific principles [5]. In response to this problem, some scholars have utilized digital and mobile devices to record exercisers' behavior and then provide guidance and corrections by professionals based on the recorded videos [6]. However, this method suffers from a time delay, as exercisers cannot correct their movements promptly. To address this issue, some scholars have built a physical exercise behavior error detection system based on neural networks, utilizing convolutional neural networks to recognize and compare physical exercise movements and provide timely feedback to exercisers [7]. However, this model has a relatively high computational complexity and lacks application stability, necessitating further optimization. Other scholars have utilized computer vision technology to recognize the behavior of physical exercisers and provide timely feedback through intelligent algorithms [8]. Additionally, some researchers have developed aggregation behavior recognition models for group sports, utilizing the ant colony algorithm to identify and recognize group sports behavior, and provide corresponding feedback based on evaluation criteria [9]. Currently, there is still a significant amount of error in identifying physical exercise behavior, particularly in dynamic movements, resulting in relatively poor accuracy. Further optimization and research are needed in this regard.

3. Ant Colony Algorithm-Based Clustering Mining Model for College Students' Physical Exercise Behavior

3.1 Construction of the College Students' Physical Exercise Behavior Model

As the human body exhibits high flexibility and experiences changes in position and velocity in different directions during movement [10], to better study the changes in college students' body movements during physical exercise, their bodies can be viewed as a whole. By examining the changes in the centroid position and the velocities generated in different directions, it is possible to a large extent reflect the characteristics of college students' physical exercise behavior. Assuming the college student's body is the centroid, it will undergo movements in the horizontal and vertical directions during the exercise process. At the same time, movements in different directions can be decomposed into horizontal and vertical motion components based on their respective speeds. Based on Formula (1), the corresponding binary description image matrix can be obtained:

$$h_{m,n} = \sum_{x=1}^i \sum_{y=1}^j x^m x^n f(x, y) \quad (1)$$

Wherein the description of the order moment is h , and the corresponding numbers are m and n , respectively. The corresponding coordinates of the different order moment numbers on the abscissa of m are x , and the description of the Binary image is $f(x, y)$.

According to the above formula, we can analyze the change of the centroid position of college students in their physical exercise behavior. If the centroid coordinate in the Binary image with the sequence number G is expressed as (x, y) , we can describe the position change of the centroid in the horizontal and vertical directions in the following image through the corresponding calculation formula, as shown in Formula (2):

$$\begin{cases} K_s = |x_{g+1} - x_g| \\ K_c = |y_{g+1} - y_g| \end{cases} \quad (2)$$

When collecting images, there is a time interval between each frame of video and every other frame of image. If time interval is considered, the velocity of the centroid motion in the horizontal and vertical directions is described as formula (3):

$$\begin{cases} v_s = \frac{25K_s}{2} \\ v_c = \frac{25K_c}{2} \end{cases} \quad (3)$$

Based on the expressions described above, the images of college students' physical exercise need to be collected from the initial video sequence and then undergo real-time normalization processing to obtain the corresponding image sequence dataset. Subsequently, the respective images can be subjected to binary mode processing to extract the corresponding local histogram features. Additionally, based on the decomposition of the centroid motion of college students in the horizontal and vertical directions, corresponding sets of feature vectors are generated.

3.2 Ant Colony Algorithm-Based Behavior Feature Clustering and Mining Model

The ant colony algorithm is derived from the natural process of ants searching for food. When searching for the same food, ants leave corresponding pheromones along the paths they pass through, and the concentration of pheromones gradually decreases over time. This means that paths with longer distances have relatively lower pheromone levels, thereby reducing the probability that other ants will choose those paths. When more ants choose the same path, the concentration of pheromones on that path will continue to increase, and typically, this path represents the shortest route between the ants and the food. Based on this idea, if the feature vectors of college students' physical exercise behaviors are considered as the targets for the ant colony to search for, and the search area is divided into a two-dimensional grid space, with a single feature vector in each different grid, the ant colony will search for the target feature vectors according to the objectives. When ants randomly walk in a two-dimensional grid and encounter a feature vector representing physical exercise behavior, they evaluate the probability of taking that target based on the similarity between the target and the neighboring feature vectors in the grid. If the probability does not meet the requirements, the ant will move randomly to another grid. To avoid missing some feature vectors, this study sets the likelihood of the ant colony and the movement of feature vectors within the grid. When ants carrying the feature vectors of college students' physical exercise behaviors encounter empty grids or grids with high consistency between the feature vectors they carry and those in the neighboring grids, they can place the feature vectors according to the probability related to the type density of the feature vectors. The likelihood of identifying the feature vector is positively correlated with its density. If the calculated density does not meet the requirements, the ant will continue to carry the feature vector. The consistency between two feature vectors can be described by the Euclidean distance, where a result of 0 indicates high consistency and a result of 1 indicates low consistency. Based on the calculated results of the Euclidean distance, a two-dimensional consistency matrix can be obtained, and based on this matrix, the local density can be calculated, as shown in Formula (4):

$$f(w_m) = \frac{\sum w_m (l + \frac{d(w_m, w_n)}{2})}{2} \quad (4)$$

Among them, the neighborhood edge length of lattice r is 1, and the area is $l * l$.

Assuming that the probability of the feature vector of college students' physical exercise behavior during ant movement is F , and the corresponding likelihood of dropping it is $F(W)$, the calculation formula is shown in (5):

$$\begin{cases} F_p(w_m) = \left(\frac{A_1}{A_1 + f(w_m)} \right)^2 \\ F_d(w_n) = \begin{cases} 2f(w_m) & f(w_m) < A_2 \\ 1 & f(w_m) \geq A_2 \end{cases} \end{cases} \quad (5)$$

The threshold constant is represented as A .

Because the Ant colony optimization algorithms in practical application will produce problems such as high difficulty of data to be processed at the initial stage of the algorithm, poor convergence efficiency, and high

probability of stagnation in the solution process, which will affect the clustering results of the characteristic vectors of college students' physical exercise behavior, this paper has carried out corresponding optimization for the problem of Ant colony optimization algorithms. The optimization is mainly carried out in two aspects: Pheromone update mode and ant selection path mode. To avoid or reduce the problem that the optimal path is ignored when the ant colony searches for the path initially, a random perturbation strategy is added in the Pheromone update, that is, when any ant in the ant colony divides any feature vector into a category, the corresponding path Pheromone concentration will increase and make corresponding marks. At this time, other ants will be affected by the pheromone of the ant, and the concentration of Pheromone on the corresponding path will also increase. In the process, different ants in the ant colony constantly search for the optimal path each time, and the Pheromone on different paths is in a dynamic state. After all ants have finished exploring, the Pheromone increment on different paths is calculated, and the selection range of the optimal path is obtained based on this result.

4. Experimental Results of the Ant Colony Algorithm-Based College Students' Physical Exercise Behavior Feature Clustering and Mining Model

The performance of clustering and mining algorithm models is critical for their practical application. Therefore, this study selected two other clustering algorithms and the optimized Ant Colony Algorithm-based behavior feature clustering and mining model for comparison. To better verify the adaptability of the clustering algorithm models across different datasets, two datasets, namely Iris and Robot Navigation, were selected for experimentation. The experimental results are shown in Figure 1. The two datasets used in the experiments are Iris and Robotnavigation, with the latter having more samples than the former. From Figure (a), it can be observed that the F-measure values of the two other clustering algorithm models are closer to each other, and there is a specific error compared to the F-measure value of this study's algorithm model. The overall fluctuation amplitude is also higher for the other two models. On the other hand, the F-measure value of this study's algorithm model has a relatively small fluctuation amplitude, indicating better model stability. In Figure (b), the results show that the F-measure values of the other two clustering algorithm models have decreased to a certain extent. In contrast, the F-measure value of this study's algorithm model remains relatively unchanged compared to Figure (a). This is mainly because the increase in the number of samples in this dataset has increased the error rate of the other two clustering algorithm models, resulting in a noticeable decrease in their F-measure values. In contrast, the clustering algorithm model in this study has a clear purpose, and even with an increase in sample data, it does not lead to an increase in the fluctuation of its error rate. Therefore, the F-measure value of this study's model remains stable in both datasets. This indicates that compared to the other two algorithm models, this study's algorithm model has higher reliability and stability. Additionally, considering the results from both datasets, it can be seen that although the algorithm model in this study does not show a significant advantage in F-measure values when the dataset is relatively small, it converges faster than the other two algorithms.

To better verify the practical effectiveness of the Ant Colony Algorithm-based college students' physical exercise behavior feature clustering and mining model, this study conducted separate clustering for common behaviors and physical exercise movements among college students. The results are presented in Figs. 2 and 3. As shown in Fig. 2, the clustering F-measure values for all common physical exercise behaviors exceed 0.8, while the F-measure values for other behaviors are not lower than 0.9. In Fig. 3, the F-measure values for slow running and fast walking, among other physical exercise behaviors, are slightly higher than 0.8, and the F-measure values for

different physical exercise behaviors exceed 0.9. This is mainly because running and walking behaviors in physical exercise have high similarity, resulting in relatively lower recognition accuracy. However, overall, the clustering effect of this study's algorithm model is good and can help avoid algorithm stagnation by preventing it from getting stuck in local optimal solutions. It also enhances the accuracy of recognizing and clustering college students' physical exercise behavior, yielding better clustering results.

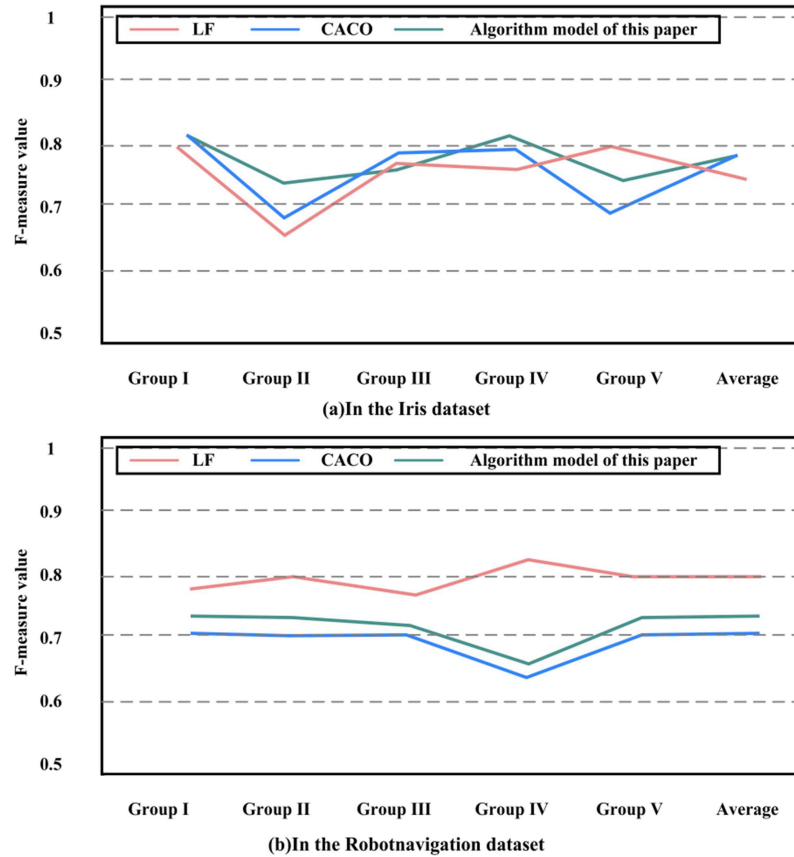


Figure 1. Comparison of F-measure values of three algorithms in two different datasets

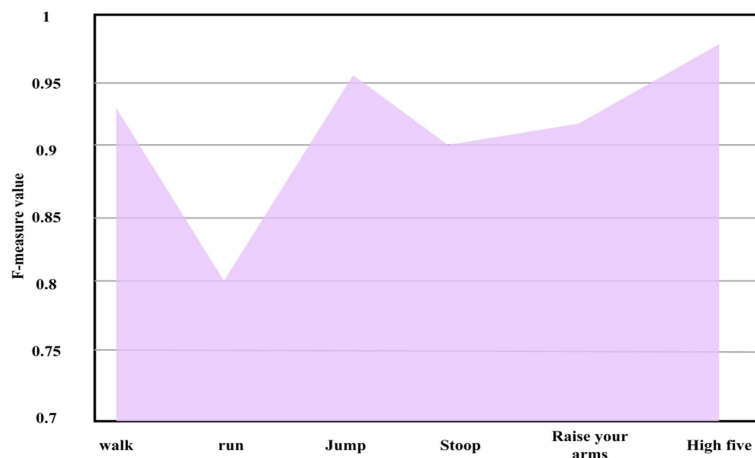


Figure 2. Clustering effect of common physical exercise behaviors in college students

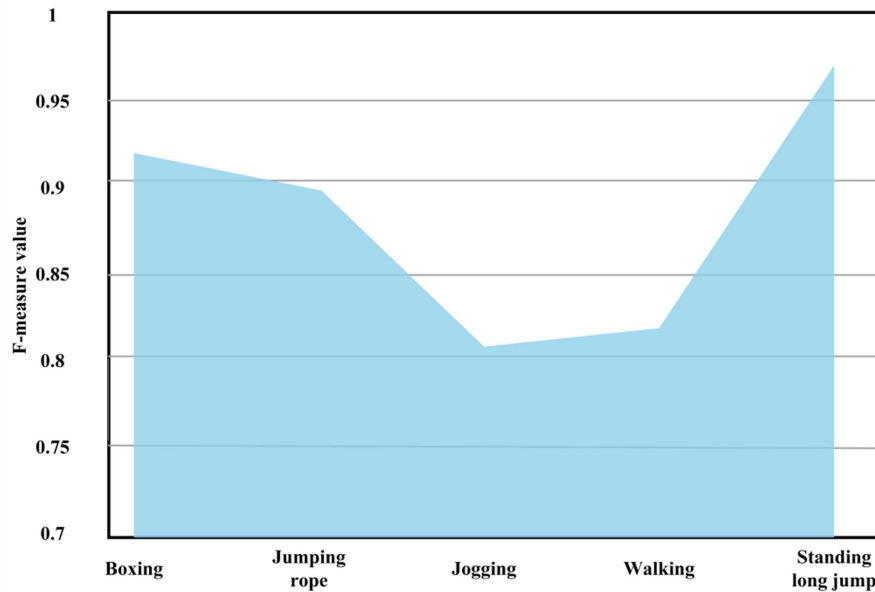


Figure 3. Clustering effect of physical exercise movements in college students

5. Conclusion

College students' physical exercise is an essential part of their self-cultivation and an indispensable guarantee for achieving self-worth and self-improvement as future talents. However, due to the lack of systematic and professional knowledge and skills in physical exercise, many college students are unable to make correct judgments about their exercise behavior and have difficulty managing exercise intensity. Therefore, this study constructed a model for extracting the features of college students' physical exercise behavior and introduced the Ant Colony Algorithm for behavior clustering. To achieve better clustering results, optimizations were made to the ant colony algorithm in terms of information pheromone concentration updates and ant path selection. The experimental results showed that the Ant Colony Algorithm-based model for clustering and mining college students' physical exercise behavior features exhibited good and stable clustering effects across different datasets. Its accuracy does not decrease with an increase in the number of dataset samples, demonstrating excellent stability and reliability. Overall, this algorithm model can achieve good clustering results for various physical exercise behaviors, although further optimization is needed to enhance the clustering effect for running and walking behaviors.

References

- [1] Zhang, Hengxin., Ye, Yingshi., Cai, Xianzhi., et al. (2020). Efficient action recognition algorithm based on human joint points. *Computer Engineering and Design*, 41(11), 176–182.
- [2] Chen, Shaofa., Ma, Qiang., Zhao, Junhao., et al. (2019). Research on the method of action detection and action recognition based on upper extremity motor scores. *Chinese Journal of Rehabilitation Medicine*, 34(6), 707–710.
- [3] Salazar, M. O. L., Deneubourg, J. L., Sempo, G. (2013). Information cascade ruling the fleeing behaviour of a gregarious insect. *Animal Behaviour*, 85(6), 1271–1285.

- [4] Zhang, X. Y., Duan, H. B., Luo, Q. N. (2014). Levenberg-Marquardt based artificial physics method for mobile robot oscillation alleviation. *Science China (Physics, Mechanics & Astronomy)*, 57(9), 1771–1777.
- [5] Gao, S., Wang, Y., Cheng, J., et al. (2016). Ant colony optimization with clustering for solving the dynamic location routing problem. *Applied Mathematics & Computation*, 285(C), 149–173.
- [6] Ji, J., Song, X., Liu, C., et al. (2013). Ant colony clustering with fitness perception and pheromone diffusion for community detection in complex networks. *Physica A: Statistical Mechanics & Its Applications*, 392(15), 3260–3272.
- [7] Ýnkaya, T., Kayalýgil, S., Özdemirel, N. E. (2015). Ant colony optimization based clustering methodology. *Applied Soft Computing*, 28, 301–311.
- [8] Moradi, P., Rostami, M. (2015). Integration of graph clustering with ant colony optimization for feature selection. *Knowledge-Based Systems*, 84(C), 144–161.
- [9] Hong, Y., Chen, L., Mo, L. (2018). Optimization of cluster resource indexing of Internet of Things based on improved ant colony algorithm. *Cluster Computing*, 2018(4), 1–9.
- [10] Zhen, K., Yucelen, T., Doucette, E., et al. (2017). A finite-time consensus framework over time-varying graph topologies with temporal constraints. *Journal of Dynamic Systems, Measurement & Control*, 139(7), 071012-1–071012-6.